


FLOAT SHOES & COLLARS (FLOSHO) (FLOCOL)

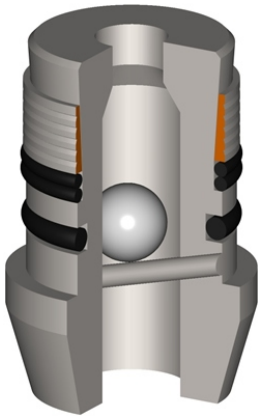

Float Shoe

Float Shoes (FLOSHO) and Float Collars (FLOCOL) act on the same principle as our Bull Nose Plugs but with a non return (one way) valve and a heavier duty locking mechanism.


The Float Shoe is used where long casing or rod strings are being used.

The Float Collar can be located inside any rod in the drill string. It is inserted into rod with a 2 way locking mechanism and non return (one way) valve.

See Also: Bull Nose Plug

Construction: Aluminium and rubber

INSTRUCTIONS FOR USE

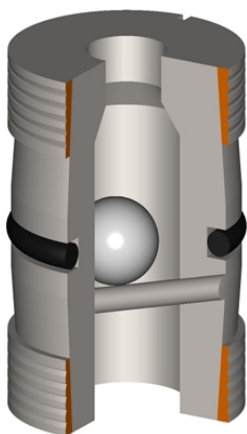

Float Collar

Float Shoes: Clean end of rod or casing free from grease or scale, insert Float Shoe into rod.

Float Collar: Clean rod or casing free from grease or scale, insert first ring into rod or casing at required position.

Insert body of float collar taking care to place non return valve flow in correct direction into rod or casing until the taper is engaged on the first ring.

Insert second ring into rod or casing and press down until ring engages taper on float collar.