




STYLE 84 SILL EXPANDER
INSTALLATION INSTRUCTIONS



1. Using pliers, crimp the open end of the sill expander closed leaving approximately a 1/16" gap (see fig. A). Use a cloth to protect finish if necessary.

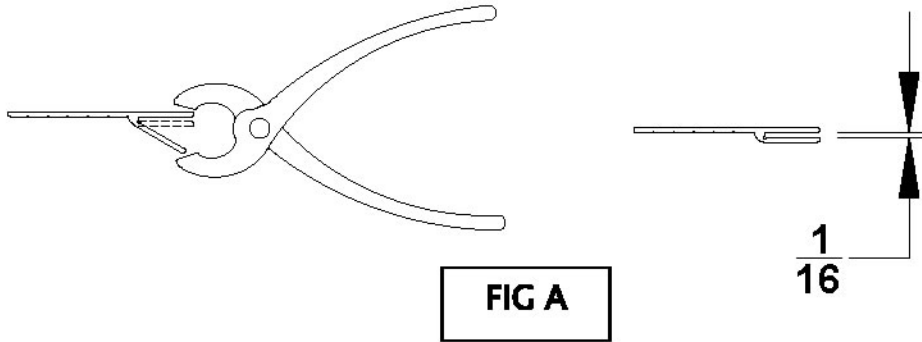

2. Slide or tap sill expander onto storm window sill nailing fin positioning the smooth side of the expander to the inside of the window (see fig. B). Secure with screws.

